



CURTAIN TRACK SPECIFICATION

TRACK DIMENSIONS

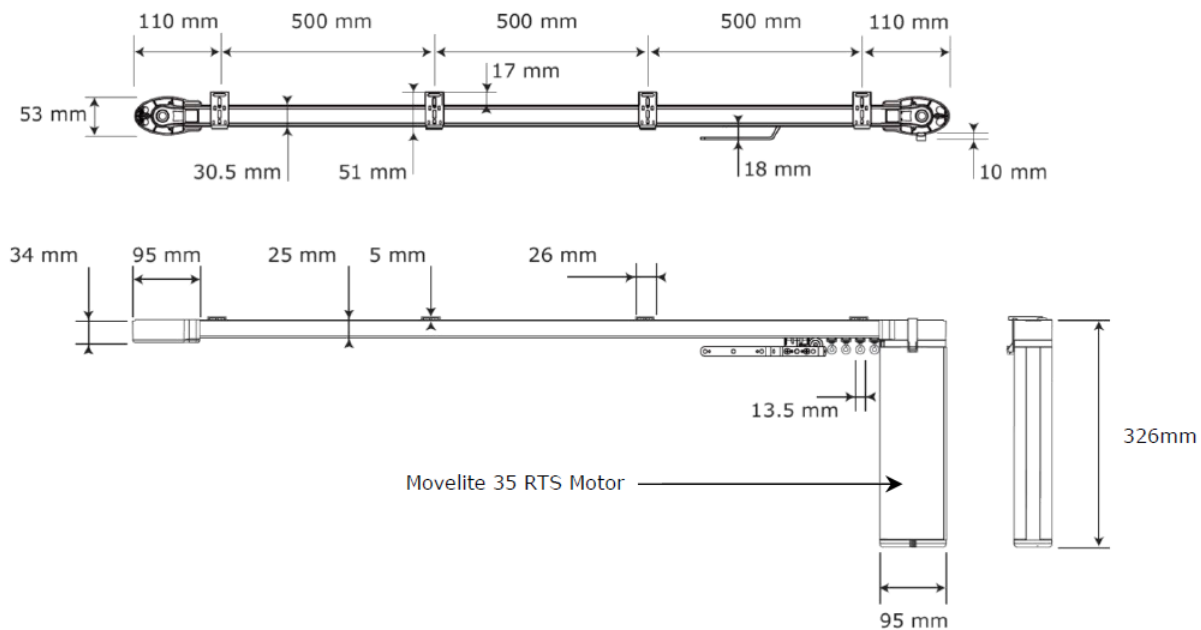


BRACKET DIMENSIONS


Swivel Bracket – composition/colour: steel/steel.

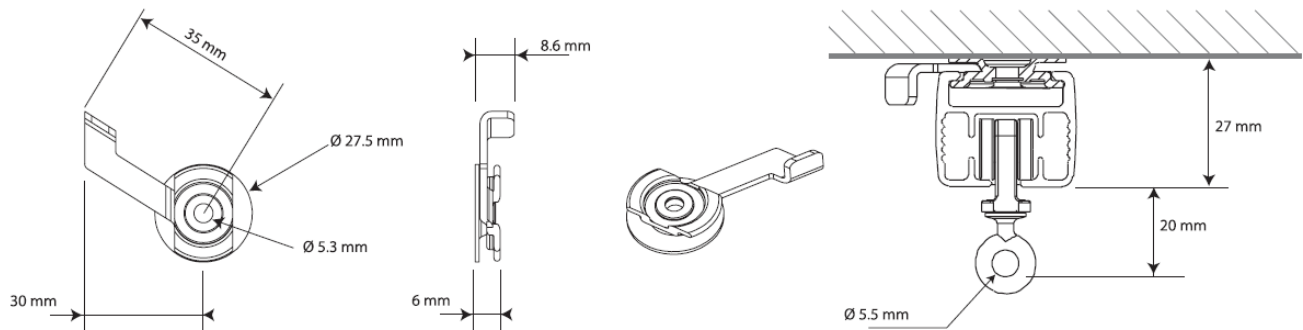

1-touch Bracket – composition/colour: steel/white.

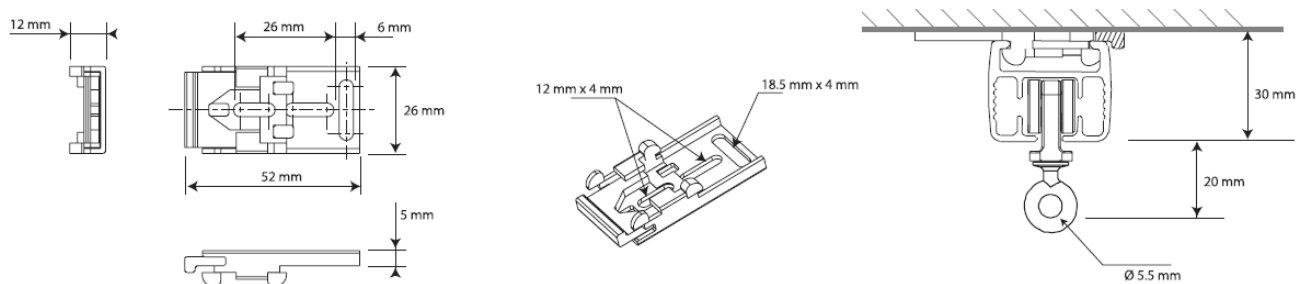

Wall Bracket – composition/colour: steel/white.

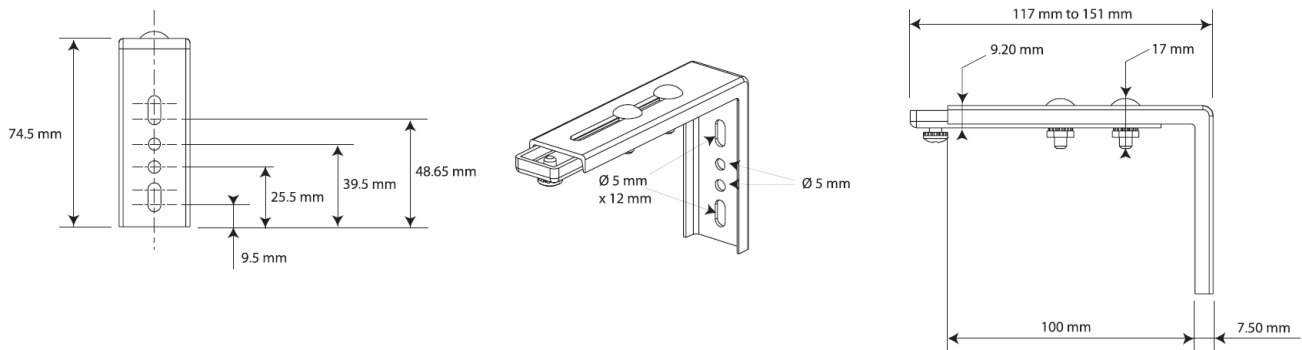


TRACK


- Colour: White
- Composition: Aluminium
- Minimum length: 111cm – Maximum length: 600cm
- Maximum fabric weight: 30kg
- Track opening: Central (pair of curtains) or single (single curtain) opening
- Track system: Standard (pinch pleat) or ripple wave
- Ripple wave pitch: Option of 60mm or 80mm
- Motor position: Option of left or right side

TRACK SYSTEMS


Standard System – central opening system (curtains at each side)

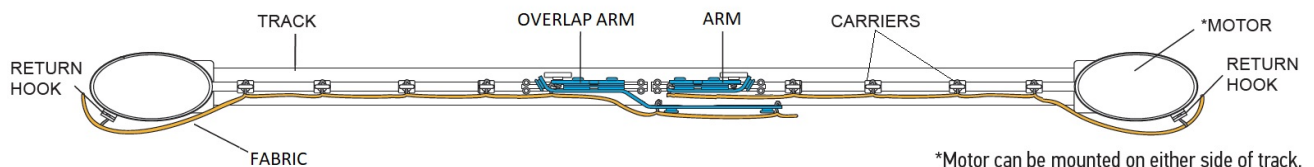


Standard System – side opening system (curtain at one side)

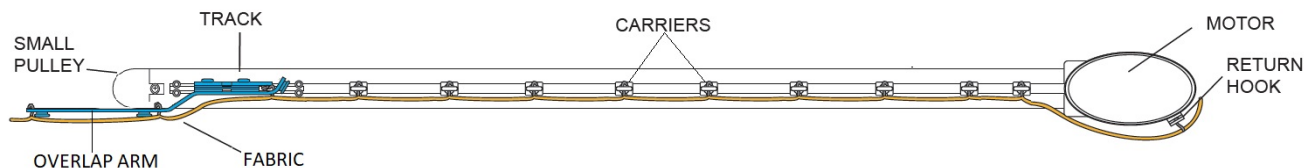

Ripple Wave System – central opening system (curtains at each side) – 60mm & 80mm systems

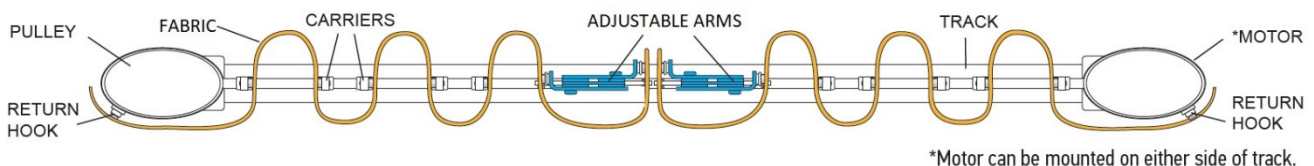

Ripple Wave System – side opening system (curtain at one side) – 60mm & 80mm systems

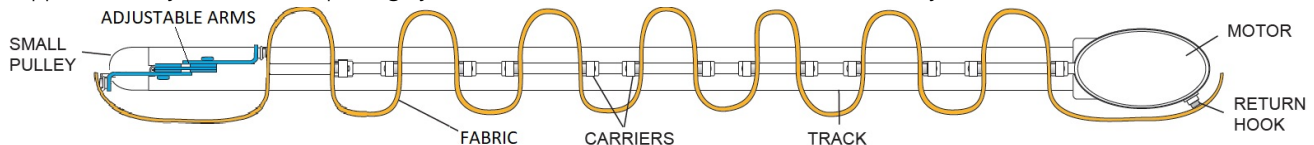


MOTORS

Movelite 35 RTS


This motor requires a 230Vac supply connecting to the motor supply cable:

- Supply Cable Length: 0.9M (90cm)
- 1 – Neutral
- 2 – Live
- 3 – Earth
- 5A fuse to be fitted in either the plug top or fused spur outlet

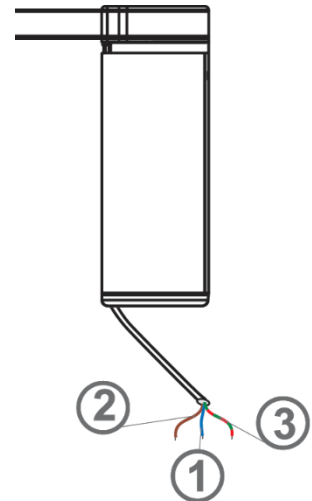

The Movelite 35 RTS motor has a RJ12 port located at the base of the motor for optional control via an automation system or similar.

- An optional 2.5M long cable can be ordered that plugs into the RJ12 port with 4 wires to connect to a switching device (hard wired switch, home automation system, etc.).
- The DCT cable is selected at the 'Optional Extras' step when ordering a Movelite 35 RTS motor system.
- This control option is with volt free contact closure – impulse control (non-maintained contact).

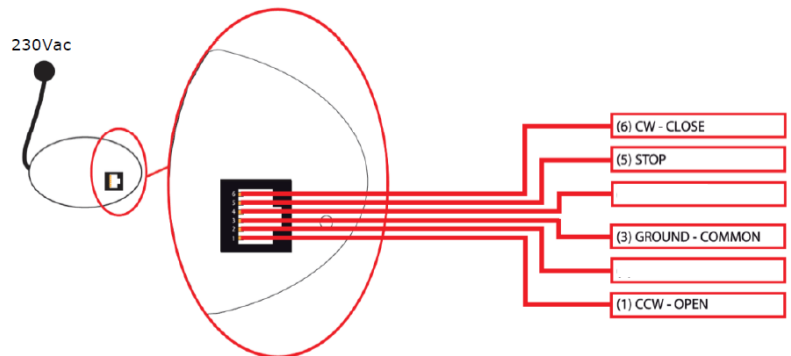

Movelite 35 RTS Wirefree

This motor is battery powered, with the battery pack housed within the base of the motor unit.

Each Movelite 35 RTS Wirefree curtain track order is supplied with a charging lead and a plug in USB charger (1 x USB charger supplied per order placed).



The battery pack can be removed from the motor base and charged at a more convenient location is desired.